




Vinyl Glass Mount is used to conceal the back side of the sign when mounted on glass. Recommended placement of signs are 60" from the floor to the top of the sign and 3" from the door frame (latch side).

INSTALLATION STEPS

1. Mounting surface must be clean and dry to ensure good adhesion.
2. Tape the vinyl backer into place along top edge on glass in location to be applied. Masking tape may be used.
3. Lift up vinyl backer and remove the release liner exposing the adhesive side of vinyl.
4. Lower vinyl backer back into place and burnish with squeegee. On larger backers, work from center outwards.
5. Slowly peel the application tape from the vinyl at a 180 degree angle.
6. Remove backing from tape on the sign. Align sign for position, check for level, and then apply firm pressure for good adhesion.

First Surface Glass Application

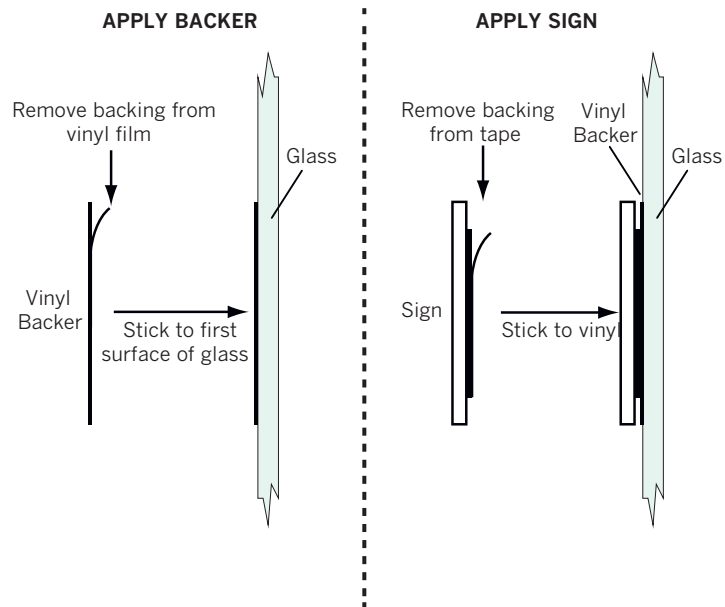

IMPORTANT: Prior to installation, remove all contents from box and inspect each sign for damage. Box should contain signs, hardware, and mounting instructions for each style of mount used. Surface of the sign must be handled with care. Clean with water and mild detergent.